
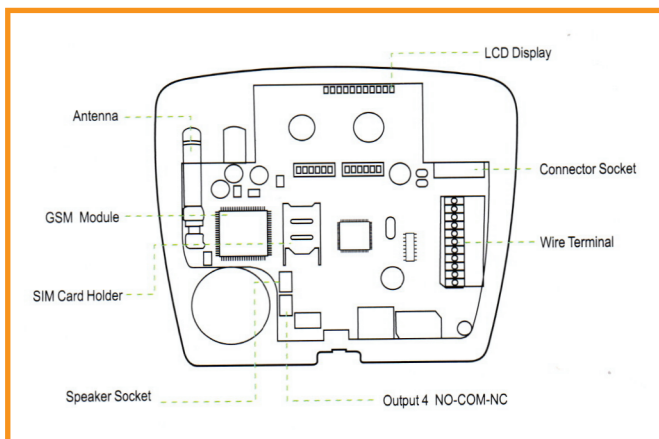


HYBIRD GSM & PSTN AUTO DIALER

ระบบโทรออกแจ้งเหตุอัตโนมัติ (Auto dialer) 10 เบอร์โทร , 10 SMS

Technical Parameters

Operating Voltage	DC 9-13.8 v
Alarm Mode	NC,NO ,Trigger
Standby current	20 ma(12v)
Dialing Mode	tone (DTMF)/pulse
GSM Frequency	850,900,1800,1900
Sim card type	Micro SIM

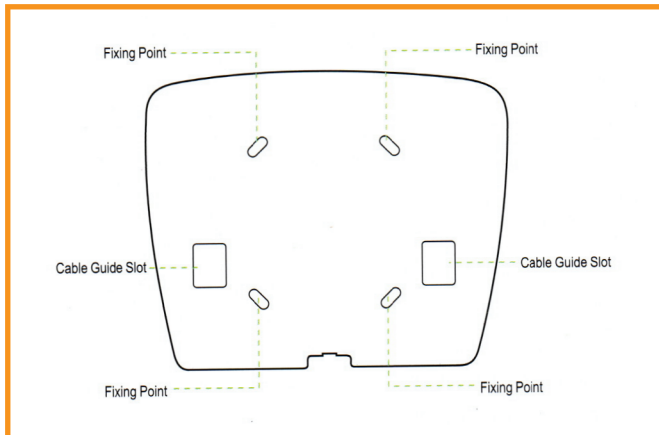

ADT-G30 GSM Quad-Band,support

2G/3G/4G network

FUNCTION INSTRUCTION

Dialing by the SIM card & telephone line trigger signal

2 controllable out put

4 trigger model(+ -)

20 alarm memory, 1-10 sms, 11-20 call

Record 20 sec voice message

LCD with back light

Level/Edge trigger model

Two dialing mode Pulse/tone Dialing

Device password protect

Flash Memory

Could use with all alarm panel

SMS text changeable

Change SIM card account by SMS

Set alarm on or off

3 COM

29 SOI PHAHOLYOTHIN 52, PHAHOLYOTHIN RD., KLONGTHANON,

SAIMAI, BANGKOK 10220 THAILAND.

TEL . 0-2972-0756-9 FAX. 0-2552-4952



S U P P L Y

www.msupplyinter.com